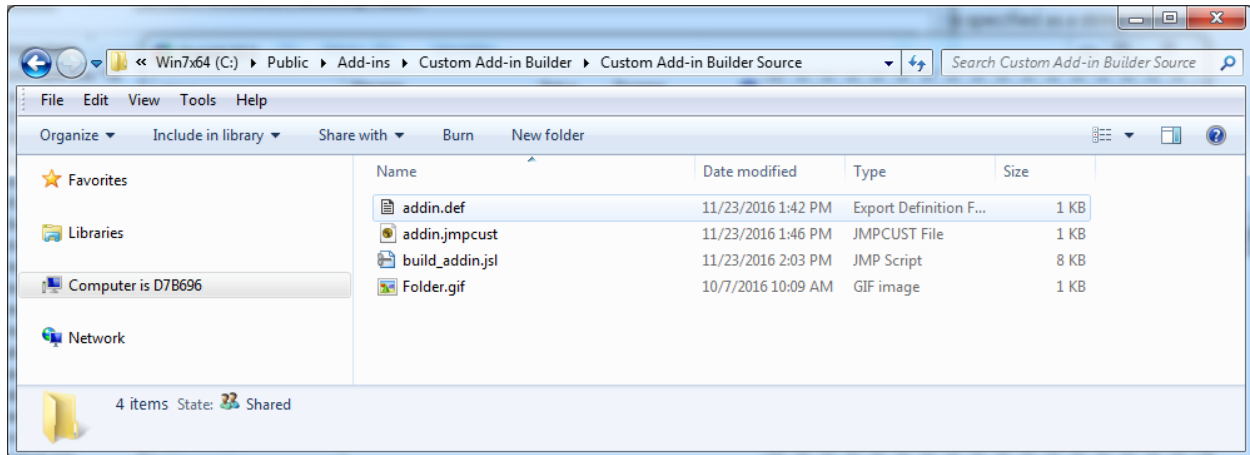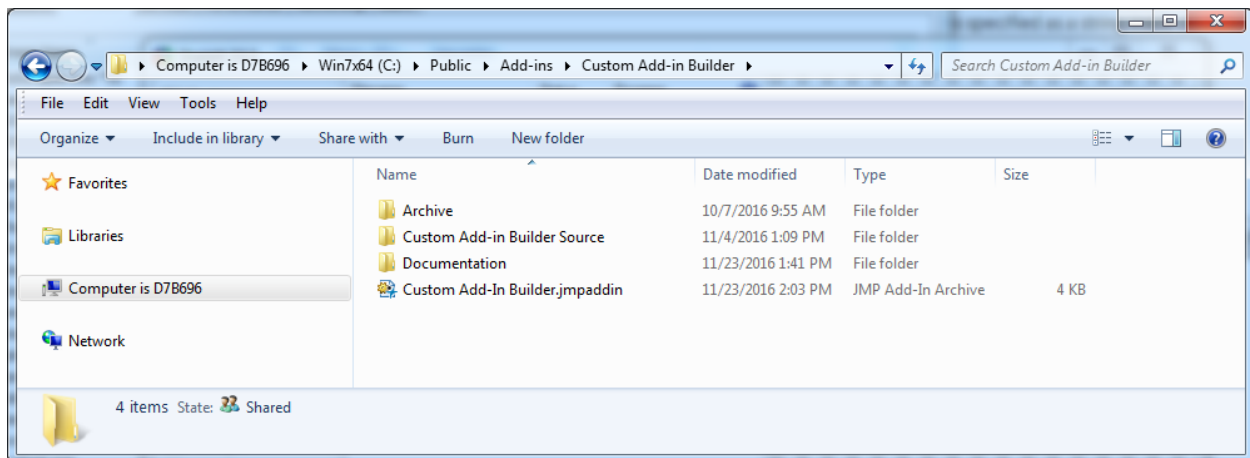# Custom Add-in Builder: Step-by-step setup guide
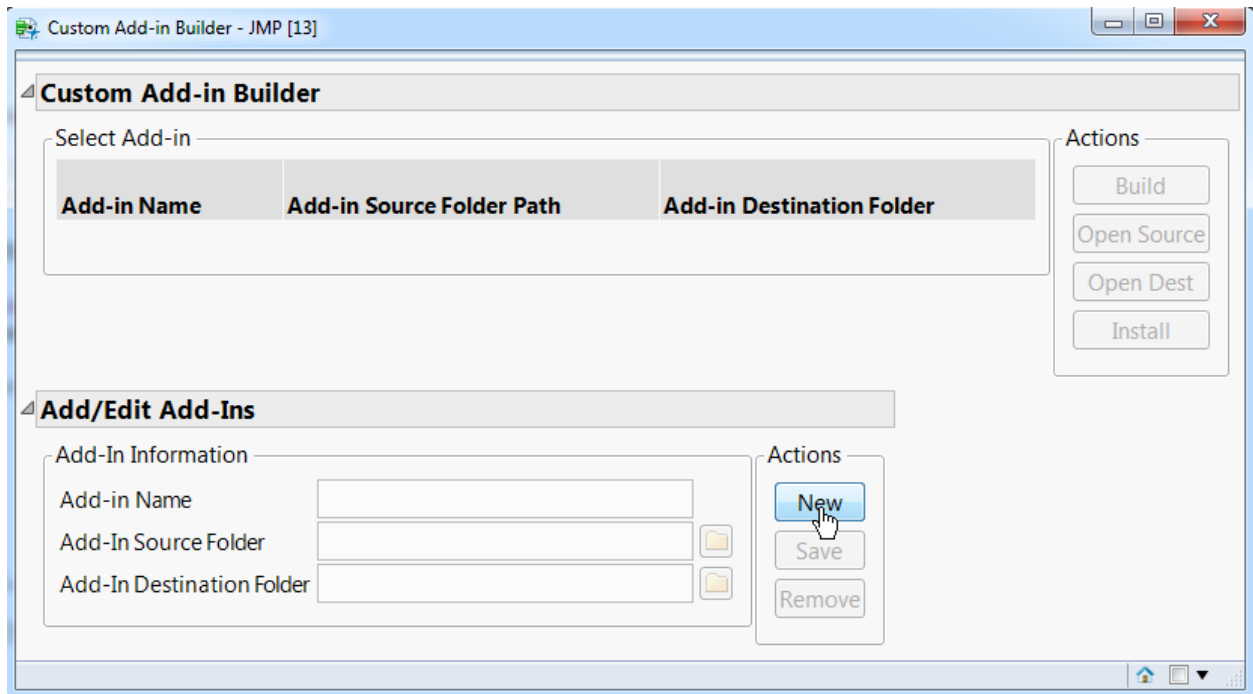
1. Establish a source folder containing any files used by your add-in. It should also contain the addin.def and addin.jmpcust files.
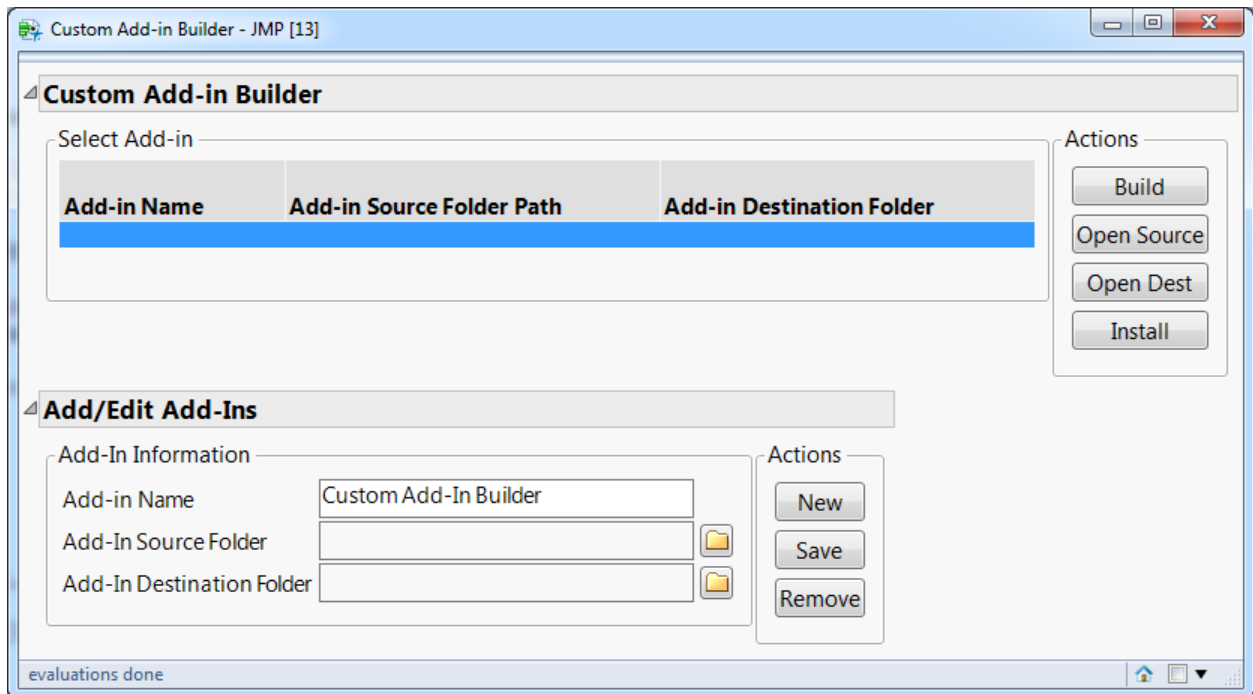

2. Establish a destination location. This will be where your .jmpaddin file is saved.
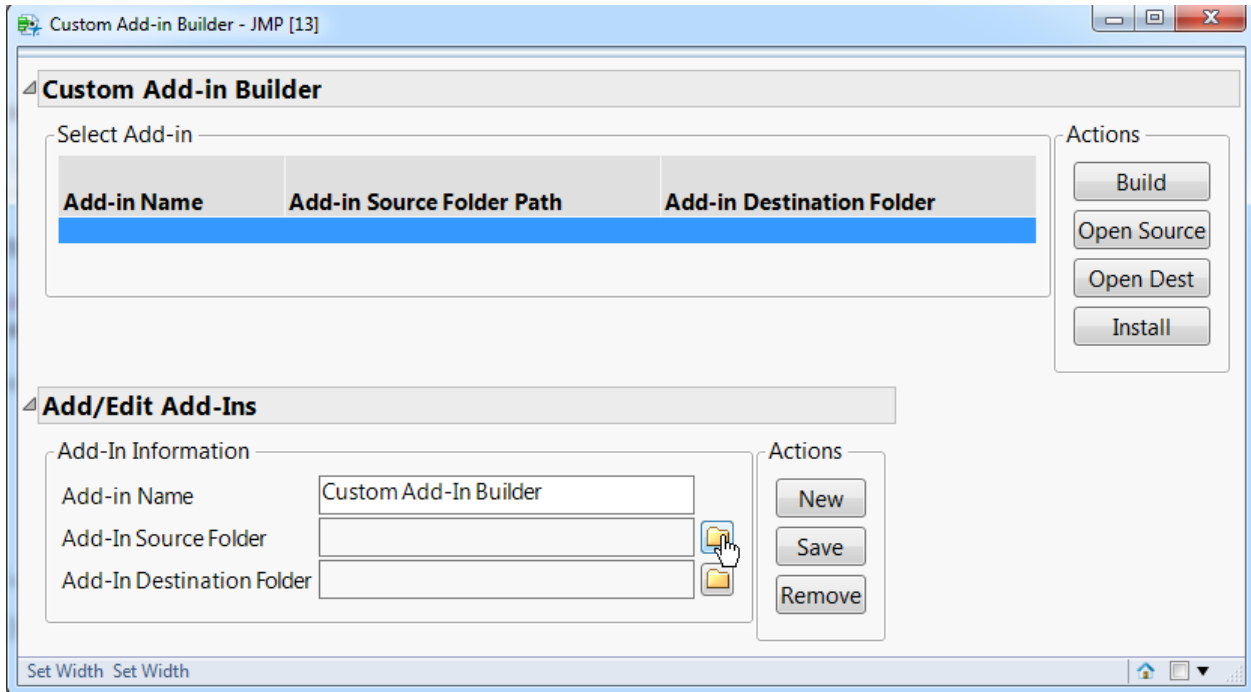
3. Click New to create a new entry for the add-in.
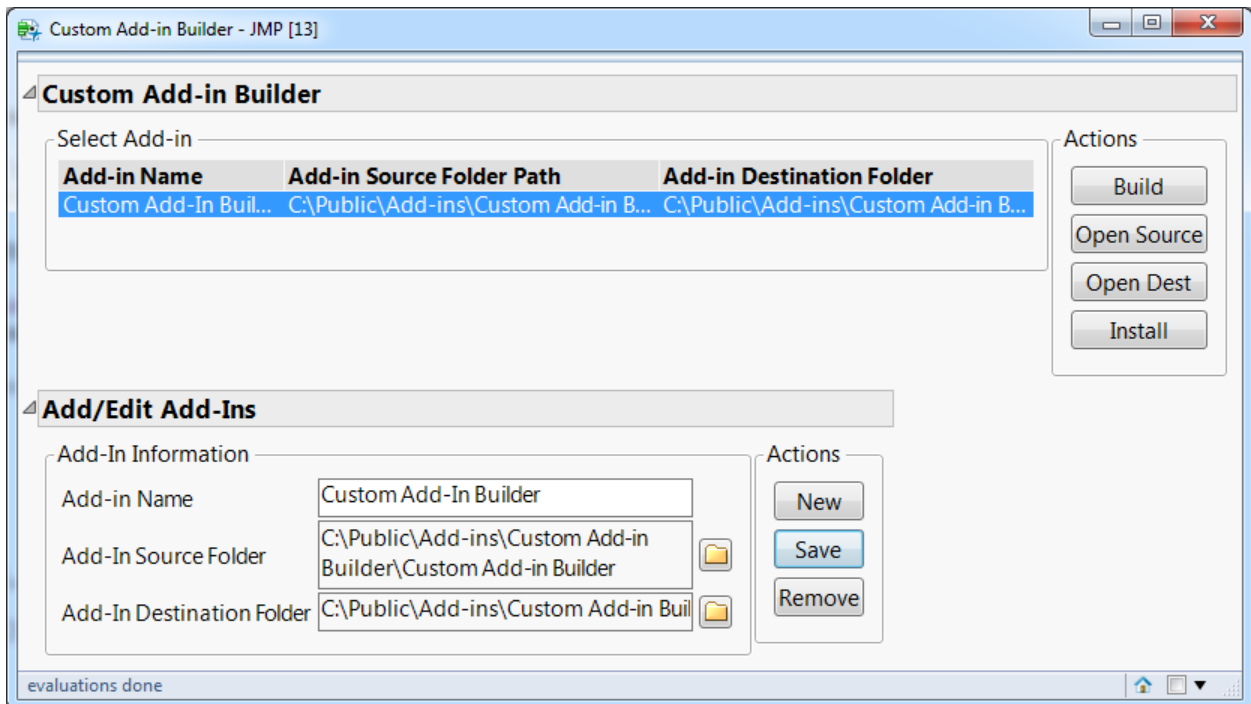

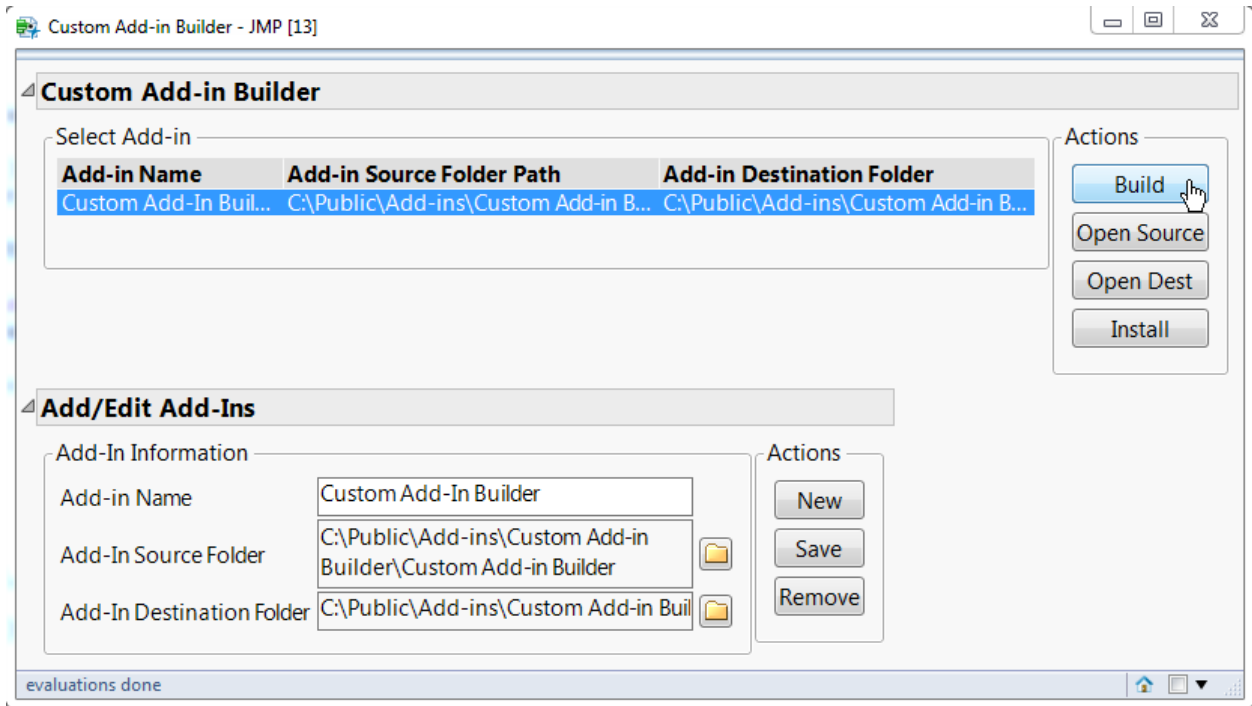4. Give add-in a name (to be the name of the jmpaddin file).

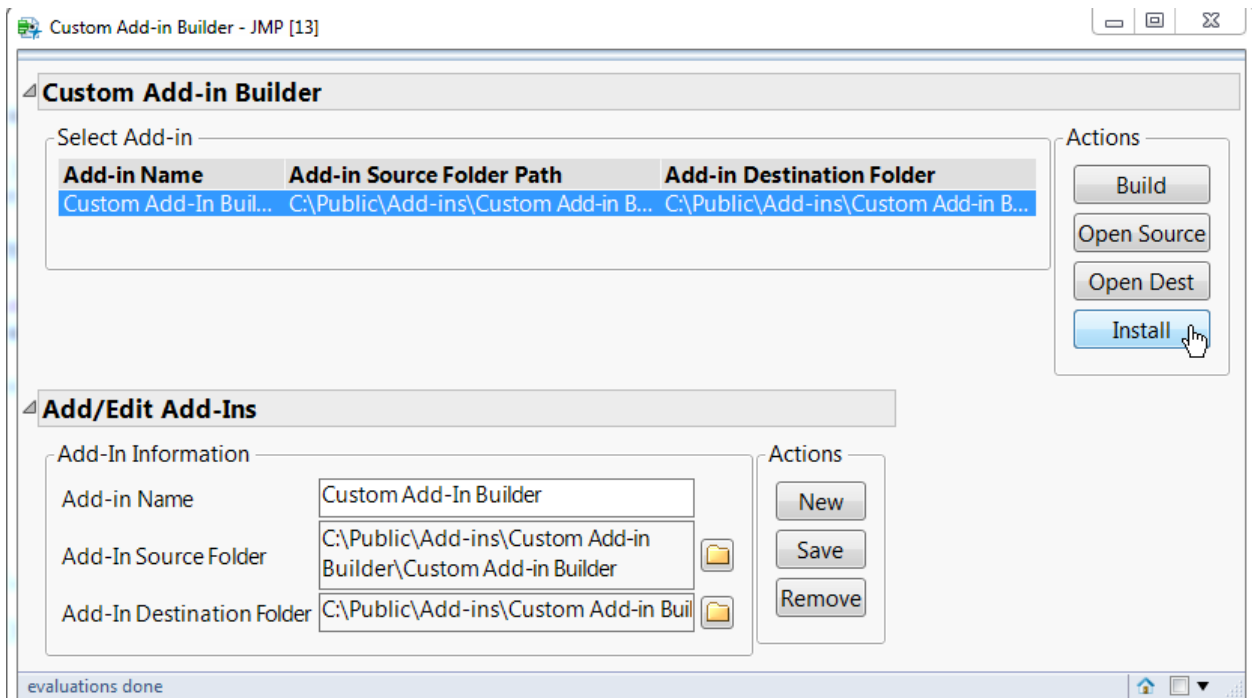5. Click Folder icon to select a source folder. Repeat for destination folder.

6. Click "Save" to save this configuration so that it the add-in can be created

7. With the add-in selected, click the "Build" button to create the .jmpaddin file. This file will be placed in the Add-in Destination folder

8. Click "Install" to install the selected add-in

9. Confirm that you want to install the add-in.

JMP Alert

? Re-install JMP Add-In "Custom Addin-Builder" (com.jmp.juchil.customaddinbuilder)?

Install   Cancel